



DC Rotary Isolator

RIDC series PV Switch-disconnector is suitable for rated voltage DC1200V, rated current 32A power system. The product can be used for infrequent connection and disconnection, which can isolate the disconnection line. It is suitable for isolating lines in DC transmission and distribution systems, such as cutting the circuit between solar panels and inverters.

- IEC/EN 60947-3 and AS 60947.3
- Utilization category: DC-PV1, DC-PV2
- Ingress Protection: IP65
- OFF Lockable
- UVresistantand Flammability UL94 V-0
- Arcing time <2ms




Rotary Isolator IP65

The main technical parameters

Electrical characteristic	
Model number	RIDC
Feature	Isolation and control
Standard	IEC60947-3, A560947.3
Utilization category	DC PVL/DC PV2
Pole	4P
Rated frequency	DC
Rated operating voltage (Ue)	300V/600V/800V/1000V/1200V
Rated insulation voltage (Ui)	1200V
Rated short-time withstand current (lcw)	1kA/1s(4,4S,4B) , 1.7kA/1s(2H)
Rated conditional short-circuit current (lcn)	3ka
Rated impulse withstand voltage (Uimp)	8.0kV
Overvoltage category	II
Polarity	No polarity, "+" and "_" polarities could be interchanged
Service Life/Cycle Operations	
Mechanical	15000
Electrical	300
Installation environment	
Ingress protection	IP20
Storage temperature	-40°C~+85°C
Mounting type	Vertically or horizontally
Pollution degree	3

Product and installation dimensions(MM)

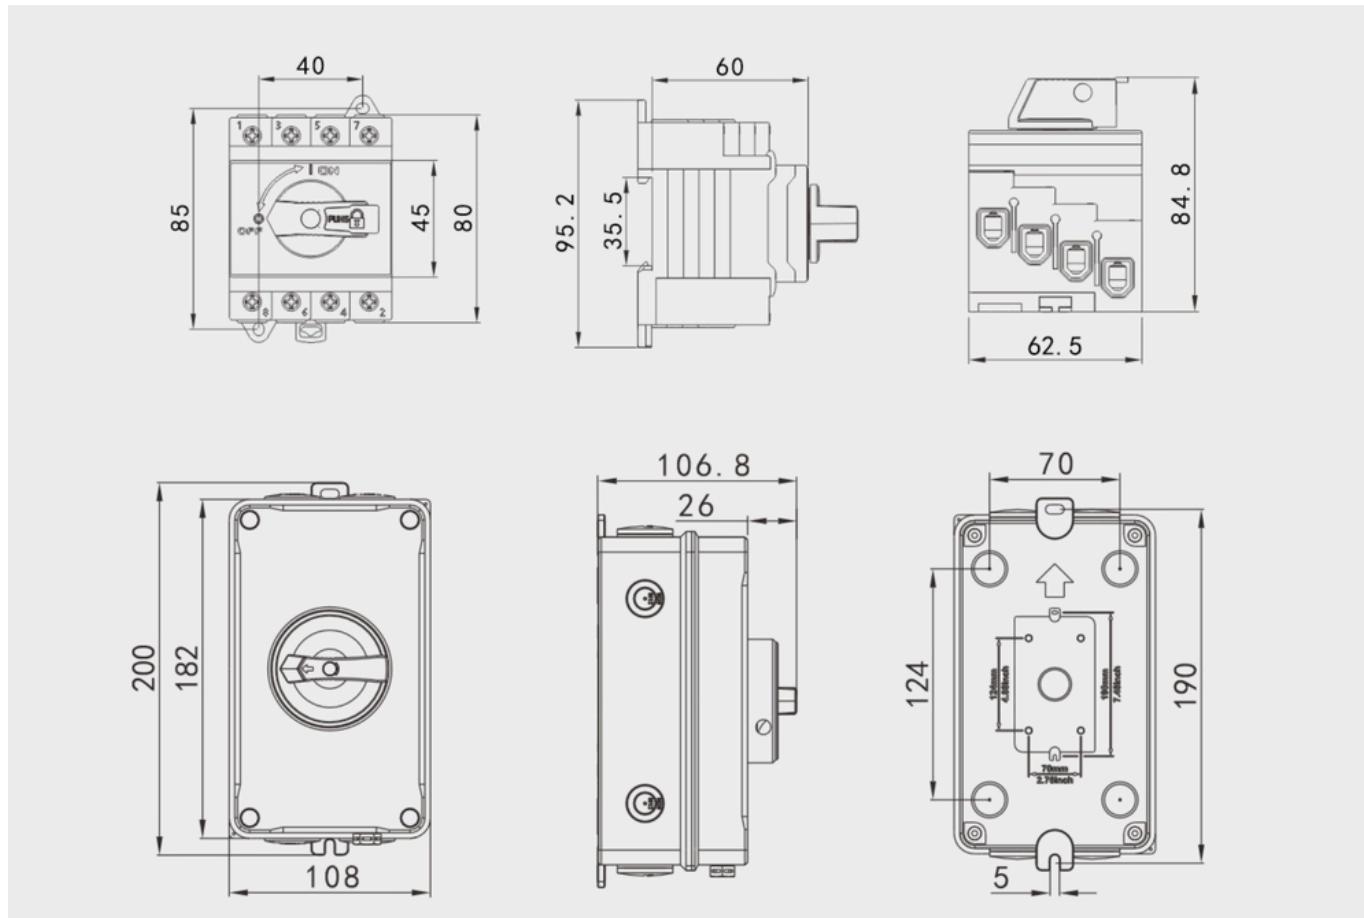

Wiring interchange - Corresponding figure:

Type	4-Pole	2-Pole With Input And Output Bottom
-	4	4B
Contacts wiring graph		
Switching examples		